


产品概述

IRG、ISW型立式卧式管道离心泵，供输送清水及物理化学性质类似于清水的其它液体之用，适用于工业和城市给排水、高层建筑增压送水、园林、喷灌、消防增压、远距离输送、暖通制冷循环、浴室等冷热水循环增压及设备配套，使用温度 $T < 100^{\circ}\text{C}$ 。

Product overview

1. IRG and ISW type vertical and horizontal pipeline centrifugal pumps are used for conveying clean water and other liquids with physical and chemical properties similar to clean water. They are suitable for industrial and urban water supply and drainage, pressurized water supply in high-rise buildings, landscaping, sprinkler irrigation, fire pressurization, long-distance transportation, HVAC refrigeration circulation, bathroom and other cold and hot water circulation pressurization and equipment matching, with a operating temperature of $T < 100^{\circ}\text{C}$.

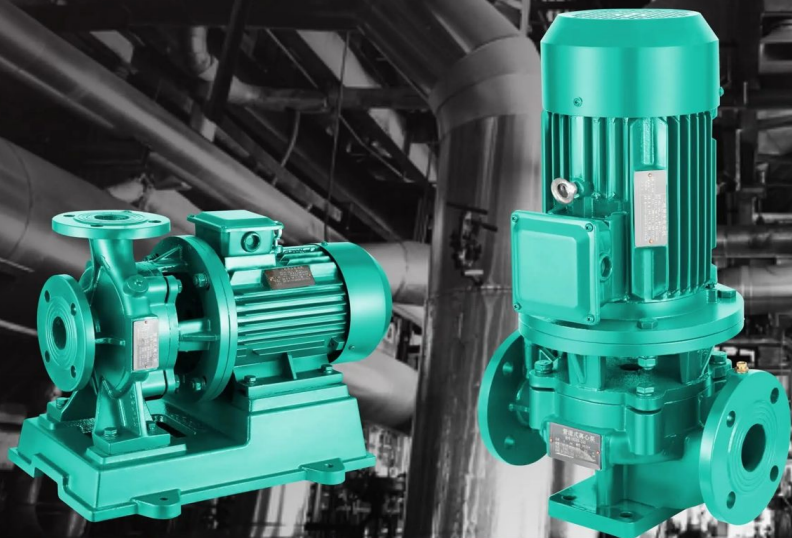

IRG/ISW SERIES

VERTICAL PIPELINE PUMP/HORIZONTAL PIPELINE PUMP

立式管道泵/卧式管道泵



全钢电机
all-steel motor



大流量
large flow



高扬程
high lift



强劲动力
strong power



高效节能
energy conservation



品质保证
quality assurance

技术参数 / Technical parameters

型号 Model	功率 power		电压 voltage	流量 Flow		扬程 Head	口径 Outlet
	Kw	HP	V	m³/h	L/min	m	mm
25-125	0.75	1	220/380	4	67	20	25
32-125	0.75	1	220/380	5	83	20	32
40-125A	0.75	1	220/380	5.6	93	16	40
40-100(I)A	0.75	1	380	11	183	10	40
50-100A	0.75	1	220/380	11	183	10	50
25-160A	1.1	1.5	380	3.7	63	28	25
32-160A	1.1	1.5	220/380	4	67	25	32
40-125	1.1	1.5	220/380	6.3	105	20	40
40-160B	1.1	1.5	380	5.5	92	24	40
40-100(I)	1.1	1.5	380	12.5	208	12.5	40
40-125(I)A	1.1	1.5	380	11	183	16	40
50-100	1.1	1.5	220/380	12.5	208	12.5	50
50-125A	1.1	1.5	380	11	183	16	50
50-100(I)A	1.1	1.5	380	22.3	372	10	50
65-100A	1.1	1.5	220/380	22.3	372	10	65
25-160	1.5	2	380	4	67	32	25
32-160	1.5	2	220/380	5	83	32	32
40-125(I)	1.5	2	380	12.5	208	20	40
40-160(I)B	1.5	2	380	10.4	173	22	40
40-160A	1.5	2	220/380	5.9	98	28	40
50-125	1.5	2	220/380	12.5	208	20	50
50-100(I)	1.5	2	380	25	417	12.5	50
50-160B	1.5	2	380	10.4	173	22	50
65-100	1.5	2	220/380	25	417	12.5	65
32-160(I)	2.2	3	380	6.3	105	32	32
32-200A	2.2	3	220/380	4.5	75	44	32
40-160	2.2	3	220/380	6.3	105	32	40
40-160(I)A	2.2	3	380	11.7	195	28	40
40-200B	2.2	3	220/380	5.3	88	36	40
50-160A	2.2	3	220/380	11.7	195	28	50
50-125(I)A	2.2	3	380	22.3	372	16	50
65-125A	2.2	3	220/380	22.3	372	16	65
65-100(I)A	2.2	3	380	44.7	745	10	65
80-100A	2.2	3	220/380	44.7	745	10	80
32-200	3	4	380	4.5	75	50	32
40-200A	3	4	380	5.9	98	44	40
40-160(I)	3	4	380	12.5	208	32	40
40-200(I)B	3	4	380	10.6	177	36	40
50-200B	3	4	380	10.6	177	36	50
50-160	3	4	380	12.5	208	32	50
50-125(I)	3	4	380	25	417	20	50
50-160(I)B	3	4	380	21.6	360	24	50
65-125	3	4	380	25	417	20	65
65-100(I)	3	4	380	50	833	12.5	65
65-160B	3	4	380	21.6	360	24	65
80-100	3	4	380	50	833	12.5	80
32-200(I)	4	5	380	6.3	105	50	32
40-200	4	5	380	6.3	105	50	40
40-200(I)A	4	5	380	11.7	195	44	40
40-250B	4	5	380	5.5	92	60	40



型号 Model	功率 power		电压 voltage	流量 Flow		扬程 Head	口径 Outlet
	Kw	HP	V	m³/h	L/min	m	mm
50-200A	4	5	380	11.7	195	44	50
50-160(I)	4	5	380	25	417	32	50
50-160(I)A	4	5	380	23.4	390	28	50
65-160	4	5	380	25	416	32	65
65-160A	4	5	380	23.4	390	28	65
65-125(I)A	4	5	380	45	750	16	65
80-125A	4	5	380	45	750	16	80
80-100(I)A	4	5	380	89	1483	10	80
100-100A	4	5	380	89	1483	10	100
40-250A	5.5	7.5	380	5.9	98	70	40
40-200(I)	5.5	7.5	380	12.5	208	50	40
50-200	5.5	7.5	380	12.5	208	50	50
50-250C	5.5	7.5	380	10	166	52	50
50-200(I)B	5.5	7.5	380	21.8	363	38	50
65-200B	5.5	7.5	380	21.8	363	38	65
65-125(I)	5.5	7.5	380	50	833	20	65
65-160(I)B	5.5	7.5	380	43.3	722	24	65
80-125	5.5	7.5	380	50	833	20	80
80-100(I)	5.5	7.5	380	100	1666	12.5	80
80-160B	5.5	7.5	380	43.3	722	24	80
100-100	5.5	7.5	380	100	1666	12.5	100
40-250	7.5	10	380	6.3	105	80	40
40-250(I)A	7.5	10	380	11.6	193	70	40
40-250(I)B	7.5	10	380	10.8	180	60	40
50-250A	7.5	10	380	11.6	193	70	50
50-200(I)	7.5	10	380	25	417	50	50
50-200(I)A	7.5	10	380	23.5	392	44	50
65-200	7.5	10	380	25	417	50	65
65-200A	7.5	10	380	23.5	392	44	65
65-200(I)B	7.5	10	380	43.5	723	38	65
65-160(I)	7.5	10	380	50	833	32	65
65-160(I)A	7.5	10	380	46.7	778	28	65
80-160	7.5	10	380	50	833	32	80
80-160A	7.5	10	380	46.7	778	28	80
80-125(I)A	7.5	10	380	89	1483	16	80
80-200B	7.5	10	380	43.5	725	38	80
100-125A	7.5	10	380	89	1483	16	100
125-100A	7.5	10	380	143	2383	10	125
150-125A	7.5	10	380	150	2500	16	150
40-250(I)	11	15	380	12.5	208	80	40
50-250	11	15	380	12.5	208	80	50
50-250(I)A	11	15	380	23.4	390	70	50
50-250(I)B	11	15	380	21.6	360	60	50
65-250A	11	15	380	23.4	390	70	65
65-250B	11	15	380	21.6	360	60	65
65-200(I)A	11	15	380	47	783	44	65
80-200A	11	15	380	47	783	44	80
80-125(I)	11	15	380	100	1666	20	80
80-160(I)A	11	15	380	93.5	1558	28	80
80-160(I)B	11	15	380	86.6	1443	24	80



技术参数 / Technical parameters

型号 Model	功率 power	电压 voltage	流量 Flow	扬程 Head	口径 Outlet
Kw	HP	V	m³/h L/min	m	mm
100-125	11 15	380	100 1666	20 100	
100-160A	11 15	380	93.5 1558	28 100	
100-160B	11 15	380	86.6 1443	24 100	
100-100(I)	11 15	380	160 2666	12.5 100	
100-125(I)A	11 15	380	140 2333	17 100	
125-100	11 15	380	160 2666	12.5 125	
125-125A	11 15	380	143 2383	16 125	
150-125A	11 15	380	150 2500	16 150	
50-250(I)	15 20	380	25 416	80 50	
50-315(I)C	15 20	380	20.6 343	85 50	
65-250	15 20	380	25 417	80 65	
65-200(I)	15 20	380	50 833	50 65	
65-250(I)B	15 20	380	43.3 372	60 65	
80-200	15 20	380	50 833	50 80	
80-250B	15 20	380	43.3 372	60 80	
80-160(I)	15 20	380	100 1666	32 80	
80-200(I)B	15 20	380	87 1450	38 80	
100-160	15 20	380	100 1666	32 100	
100-200B	15 20	380	87 1450	38 100	
100-125(I)A	15 20	380	160 2666	20 100	
125-125	15 20	380	160 2666	20 125	
125-160B	15 20	380	138 2300	24 125	
150-125	15 20	380	160 2666	20 150	
150-160B	15 20	380	140 2333	24 150	
50-315(I)B	18.5 25	380	22.5 375	101 50	
65-315B	18.5 25	380	22.5 375	101 65	
65-315C	18.5 25	380	20.6 342	85 65	
65-250(I)A	18.5 25	380	46.7 778	70 65	
80-250A	18.5 25	380	46.7 778	70 80	
80-200(I)A	18.5 25	380	93.5 1558	44 80	
100-200A	18.5 25	380	93.5 1558	44 100	
100-160(I)A	18.5 25	380	140 2333	28 100	
125-160A	18.5 25	380	150 2500	28 125	
150-160A	18.5 25	380	150 2500	28 150	
50-315(I)A	22 30	380	23.7 395	113 50	
65-315A	22 30	380	23.7 395	113 65	
65-250(I)	22 30	380	50 833	80 65	
65-315(I)C	22 30	380	41 683	85 65	
80-250	22 30	380	50 833	80 80	
80-315C	22 30	380	41 683	85 80	
80-200(I)	22 30	380	100 1666	50 80	
100-200	22 30	380	100 1666	50 100	
100-160(I)	22 30	380	160 2666	32 100	
100-200(I)B	22 30	380	100 1666	40 100	
125-160	22 30	380	160 2666	32 125	
125-200B	22 30	380	138 2300	37.5 125	
150-160	22 30	380	150 2500	16 150	
50-315(I)	30 30	380	25 416	125 50	
65-315	30 30	380	25 416	125 65	
65-315(I)A	30 30	380	46.5 775	110 65	

型号 Model	功率 power	电压 voltage	流量 Flow	扬程 Head	口径 Outlet
Kw	HP	V	m³/h L/min	m	mm
65-315(I)B	30 41	380	44.5 742	100 65	
80-315A	30 41	380	46.5 775	110 80	
80-315B	30 41	380	44.5 742	100 80	
80-250(I)A	30 41	380	93.5 1558	70 80	
80-250(I)B	30 41	380	87 1450	60 80	
100-250A	30 41	380	93.5 1558	70 100	
100-250B	30 41	380	87 1450	60 100	
100-200(I)A	30 41	380	140 2333	45 100	
125-200A	30 41	380	150 2500	44 125	
150-200B	30 41	380	172 2866	37 150	
65-315(I)	37 50	380	50 833	125 65	
80-315	37 50	380	50 833	125 80	
80-350B	37 50	380	40 666	135 80	
80-250(I)	37 50	380	100 1666	80 80	
80-315(I)C	37 50	380	82 1366	85 80	
100-250	37 50	380	100 1666	80 100	
100-315C	37 50	380	82 1366	85 100	
100-200(I)	37 50	380	160 2666	50 100	
100-250(I)B	37 50	380	100 1666	65 100	
125-200	37 50	380	160 2666	50 125	
125-250B	37 50	380	138 2300	60 125	
150-200A	37 50	380	187 3116	44 150	
80-315A	45 61	380	46.6 776	142 80	
80-315(I)B	45 61	380	90 1500	101 80	
100-315B	45 61	380	90 1500	101 100	
100-250(I)A	45 61	380	140 2333	72 100	
125-250A	45 61	380	150 2500	70 125	
150-200	45 61	380	200 3333	50 150	
150-250B	45 61	380	167 2783	60 150	
80-350	55 75	380	50 833	150 80	
80-315(I)A	55 75	380	95 1583	113 80	
100-315A	55 75	380	95 1583	113 100	
100-250(I)	55 75	380	160 2666	80 100	
125-250	55 75	380	160 2666	80 125	
125-315C	55 75	380	134 2333	88 125	
150-250A	55 75	380	184.4 3073	70 150	
80-315(I)	75 102	380	100 1666	125 80	
100-315	75 102	380	100 1666	125 100	
100-350A	75 102	380	87 1450	142 100	
125-315A	75 102	380	150 2500	110 125	
125-315B	75 102	380	143 2383	100 125	
125-350B	75 102	380	143 2383	135 125	
150-250	75 102	380	200 3333	80 150	
150-315B	75 102	380	173 2883	100 150	
100-350	90 122	380	100 1666	150 100	
125-315	90 122	380	160 2666	125 125	
125-350A	90 122	380	150 2500	142 125	
150-315A	90 122	380	187 3116	110 150	
150-350A	90 122	380	150 2500	142 150	
125-350	110 150	380	160 2666	150 125	
150-315	110 150	380	200 3333	125 150	
150-350	110 150	380	160 2666	150 150	

技术参数 / Technical parameters

型号 Model	功率 power	电压 voltage	流量 Flow	扬程 Head	口径 Outlet
Kw	HP	V	m³/h L/min	m	mm
40-250A	0.75 1	380	2.8 47	16 40	
40-200(I)	0.75 1	380	6.3 105	12.5 40	
40-250(I)B	0.75 1	380	5.1 85	13 40	
50-200	0.75 1	380	6.3 105	12.5 50	
50-200(I)A	0.75 1	380	11.3 188	10 50	
50-250B	0.75 1	380	5.1 85	13 50	
65-125(I)	0.75 1	380	25 416	5 65	
65-160(I)A	0.75 1	380	21.6 360	6 65	
65-200A	0.75 1	380	11.3 188	10.1 65	
80-100(I)	0.75 1	380	50 833	3 80	
80-125	0.75 1	380	25 416	5 80	
80-160A	0.75 1	380	21.6 360	6 80	
100-100	0.75 1	380	50 833	3 100	
40-250	1.1 1.5	380	3.2 53	20 40	
50-200(I)	1.1 1.5	380	12.5 208	12.5 50	
50-250A	1.1 1.5	380	5.6 93	16 50	
50-250(I)B	1.1 1.5	380	10.2 170	13.4 50	
65-160(I)	1.1 1.5	380	25 416	8 65	
65-200	1.1 1.5	380	12.5 208	12.5 65	
65-250B	1.1 1.5	380	10.2 170	13.4 65	
80-125(I)	1.1 1.5	380	50 833	5 80	
80-125(I)A	1.1 1.5	380	44.6 743	4 80	
80-160	1.1 1.5	380	25 416	8 80	
100-125	1.1 1.5	380	50 833	5 100	
40-250(I)	1.5 2	380	6.3 105	20 40	
50-250	1.5 2	380	6.3 105	20 50	
50-250(I)A	1.5 2	380	11.7 195	17.6 50	
65-200(I)A	1.5 2	380	23.3 388	10.9 65	
65-250A	1.5 2	380	11.7 195	17.6 65	
65-250(I)B	1.5 2	380	19.8 330	12.6 65	
80-160(I)A	1.5 2	380	44.5 742	6.3 80	
80-200A	1.5 2	380	23.3 388	10.9 80	
80-250B	1.5 2	380	19.8 330	12.6 80	
100-160A	1.5 2	380	44.5 742	6.3 100	
125-125A	1.5 2	380	71.5 1191	4 125	
50-250(I)	2.2 3	380	12.5 208	20 50	
65-200(I)	2.2 3	380	25 416	12.5 65	
65-250	2.2 3	380	12.5 208	20 65	
80-160(I)	2.2 3	380	50 833	8 80	
80-200	2.2 3	380	25 416	12.5 80	
80-250A	2.2 3	380	22.2 370	15.8 80	
100-100	2.2 3	380	80 1333	6 100	
100-125(I)	2.2 3	380	100 1666	5 100	
100-160	2.2 3	380	50 833	8 100	
100-200A	2.2 3	380	44.6 743	9.9 100	
125-125	2.2 3	380	80 1333	5 125	
125-160A	2.2 3	380	69.3 1155	6 125	
50-315(I)A	3 4	380	11.7 195	28 50	
50-315(I)B	3 4	380	10.2 170	21 50	
65-250(I)	3 4	380	25 416	20 65	
65-315A	3 4	380	11.7 195	28 65	
65-315(I)B	3 4	380	20.2 336	21 65	



型号 Model	功率 power	电压 voltage	流量 Flow	扬程 Head	口径 Outlet
Kw	HP	V	m³/h L/min	m	mm
80-200(I)	3 4	380	50 833	12.35 80	
80-250	3 4	380	25 416	20 80	
80-250(I)B	3 4	380	40.4 673	13.1 80	
80-315B	3 4	380	20.2 336	21 80	
100-100	3 4	380	80 1333	10 100	
100-200	3 4	380	50 833	12.5 100	
100-250B	3 4	380	40.4 673	13.1 100	
125-160	3 4	380	80 1333	8 125	
50-315(I)	4 5	380	12.5 208	32 50	
65-315	4 5	380	12.5 208	32 65	
65-315(I)A	4 5	380	23 283	27.9 65	
80-250(I)A	4 5	380	46.7 778	17.4 80	
80-315A	4 5	380	23 383	27.9 80	
100-160(I)	4 5	380	100 1666	8 100	
100-250A	4 5	380	46.7 778	17.4 100	
125-200A	4 5	380	75 1250	11 125	
65-315(I)	5.5 7	380	25 416	32 65	
80-250(I)	5.5 7	380	50 833	20 80	
80-315	5.5 7	380	25 416	32 80	
80-315(I)B	5.5 7	380	40.5 674	21 80	
100-200(I)	5.5 7	380	100 1666	12.5 100	
100-250	5.5 7	380	50 833	20 100	
100-250(I)B	5.5 7	380	87 1450	15 100	
100-315B	5.5 7	380	40.5 674	21 100	
125-200	5.5 7	380	80 1333	12.5 125	
125-250B	5.5 7	380	69 1150	15 125	

技术参数 / Technical parameters

型号 Model	功率 power	电压 voltage	流量 Flow	扬程 Head	口径 Outlet		
	Kw	HP	V	m³/h	L/min	m	mm
125-315	15	20	380	32	533	16	125
125-315(I)B	15	20	380	24	400	12.5	125
150-200	15	20	380	12.5	208	13	150
150-250A	15	20	380	17	283	12.5	150
150-315B	15	20	380	24	400	10	150
200-200	15	20	380	12.5	208	13	200
200-250A	15	20	380	17	283	5	200
100-400(I)A	18.5	25	380	44	733	6	100
100-400(I)B	18.5	25	380	38	633	10.1	100
125-315(I)A	18.5	25	380	28	466	3	125
125-400B	18.5	25	380	37.5	625	5	125
150-250	18.5	25	380	20	333	6	150
150-315B	18.5	25	380	24	400	3	150
200-250	18.5	25	380	20	333	20	200
200-315B	18.5	25	380	24	400	12.5	200
200-200(I)A	18.5	25	380	10	166	16	200
200-250(I)B	18.5	25	380	13	216	13.4	200
100-400(I)	22	30	380	50	833	8	100
100-400(I)A	22	30	380	44	733	12.5	100
125-315(I)	22	30	380	32	533	13.4	125
125-400A	22	30	380	44	733	5	125
150-400C	22	30	380	32	533	4	150
150-315A	22	30	380	28	466	8	150
200-315A	22	30	380	28	466	5	200
200-200(I)	22	30	380	12.5	208	20	200
200-250(I)A	22	30	380	14	233	20	200
200-400C	22	30	380	32	533	17.6	200
250-235	22	30	380	12.5	208	10.9	250
125-400	30	41	380	50	833	17.6	125
125-400(I)A	30	41	380	44	733	12.6	125
125-400(I)B	30	41	380	38	633	6.3	125
150-315	30	41	380	32	533	10.9	150
150-400B	30	41	380	38	633	12.6	150
200-315	30	41	380	32	533	6.3	200
200-400B	30	41	380	38	633	4	200
200-250(I)	30	41	380	20	333	20	200
125-400(I)	37	50	380	50	833	12.5	125
150-400A	37	50	380	44	733	20	150
200-315(I)B	37	50	380	24	400	8	200
200-400A	37	50	380	44	733	12.5	200
250-250A	37	50	380	17	283	15.8	250
250-300	37	50	380	20	333	6	250
300-235B	37	50	380	12.8	213	5	300
150-400	45	61	380	50	833	8	150
200-400	45	61	380	50	833	9.9	200
200-315A	45	61	380	28	466	5	200
200-315II	45	61	380	32	533	6	200
200-400IC	45	61	380	32	533	28	200
200-400IIB	45	61	380	38	633	21	200
250-250	45	61	380	20	333	20	250
250-315B	45	61	380	24	400	28	250
300-250A	45	61	380	17	283	21	300



型号 Model	功率 power		电压 voltage	流量 Flow		扬程 Head	口径 Outlet
	kw	HP	V	m³/h	L/min	m	mm
150-500B	55	75	380	166	2766	62	150
200-500B	55	75	380	166	2766	62	200
200-315I	55	75	380	400	666	32	200
200-400IB	55	75	380	346	5766	38	200
200-400IIA	55	75	380	280	4666	44	200
200-500IIC	55	75	380	245	4083	52	200
250-315A	55	75	380	500	8333	28	250
250-400C	55	75	380	429	7150	31	250
300-250	55	75	380	720	12000	20	300
300-315B	55	75	380	580	9666	24	300
150-500A	75	102	380	182	3033	70	150
200-500A	75	102	380	182	3033	70	200
200-400I	75	102	380	400	666	50	200
200-400IA	75	102	380	374	6233	44	200
200-400II	75	102	380	300	5000	50	200
200-500IC	75	102	380	320	5333	50	200
200-500IIB	75	102	380	262	4366	60	200
250-315	75	102	380	550	9166	32	250
250-400B	75	102	380	460	7666	38	250
300-315A	75	102	380	650	10833	28	300
300-400C	75	102	380	536	8933	31	300
350-250A	75	102	380	1080	18000	16	350
150-500	90	122	380	200	3333	80	150
200-500	90	122	380	200	3333	80	200
200-500IB	90	122	380	346	5766	60	200
200-500IIA	90	122	380	280	4666	70	200
250-400A	90	122	380	515	8583	44	250
300-315	90	122	380	720	12000	32	300
300-400B	90	122	380	609	10150	38	300
350-250	90	122	380	1200	20000	20	350
200-500IA	110	150	380	374	6233	70	200
200-500II	110	150	380	300	5000	80	200
250-400	110	150	380	550	9166	50	250
250-500C	110	150	380	430	7166	50	250
300-400A	110	150	380	662	11033	44	300
300-500C	110	150	380	570	9500	50	300
350-315B	110	150	380	1040	17333	24	350
200-500I	132	179	380	400	666	80	200
250-500B	132	179	380	470	7833	60	250
300-235IA	132	179	380	960	16000	36	300
300-400	132	179	380	600	10000	50	300
350-315A	132	179	380	1120	18666	28	350
250-500A	160	217	380	510	8500	70	250
300-235I	160	217	380	1080	18000	40	300
300-500B	160	217	380	625	10416	60	300
350-315	160	217	380	1200	20000	32	350
350-400C	160	217	380	905	15083	31	350
250-500	185	251	380	550	9166	80	250
300-500A	200	272	380	675	11250	70	300
350-400B	200	272	380	1040	17333	38	350
350-400A	220	299	380	1120	18666	44	350
300-500	250	340	380	720	12000	80	300
350-400	250	340	380	1200	20000	50	350



CDL SERIES

VERTICAL MULTISTAGE PUMPS

立式多级泵