

WQD (A SERIES)

SMALL PA SEWAGE SUBMERSIBLE PUMP

小型PA污水潜水泵



WQD (A SERIES)

SMALL PA SEWAGE SUBMERSIBLE PUMP

小型PA污水潜水泵


产品特点:

WQD系列由于体积小、重量轻，特别适用于农村地区的地下水、农田灌溉和水产养殖。充氧给排水、花园灌溉和酒店、食堂、小高层建筑等场所的供水。

Scope of application:

Due to its small size and light weight, WOD series is especially suitable for underground pumping, farmland irrigation and aquaculture in rural areas. Oxygenated water supply and drainage, garden irrigation and water supply in hotels, canteens, small high-rise buildings and other places.

型号规格 / Model specification

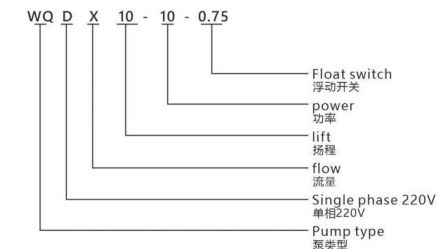

PA塑料优势 Advantages of PA plastic:


流道更光滑
Smoother runner
耐磨损性能强
Strong wear resistance
防腐性能强
Strong corrosion resistance
使用寿命长
Long service life

普通铸铁劣势 Disadvantages of ordinary cast iron:

流道粗糙
Rough runner
易磨损断裂
Easy to wear and fracture
防腐性能差
Poor corrosion resistance
使用寿命低
Low service life

安装尺寸 / Installation dimensions

型号 Model	A mm	B mm	C mm	D mm	E mm	F mm
WQD3-5-0.18	350	97	51	175	75	121
WQD4-6-0.37	350	97	51	175	75	121
WQD-6-7-0.55	390	120	76	220	11	170
WQD10-10-0.75	390	120	76	220	11	170
WQD13-10-1.1	405	135	76	223	12	175
WQD15-12-1.5	405	135	76	223	12	175

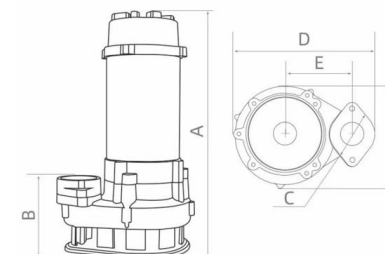

技术参数 / Technical parameters

型号 Model	功率 power		电压 voltage	额定流量 Rated flow		额定扬程 Rated head	最大流量 Max. flow	最高扬程 Max. head	口径 Outlet
220V/380V	Kw	HP	V	m³/h	L/min	m	m³/h	m	mm
WQD3-5-0.18	0.18	0.2	220/380	3	50	5	7	6	25/32
WQD4-6-0.37	0.37	0.5	220/380	4	66	6	9	8	25/32/40
WQD-6-7-0.55	0.55	0.7	220/380	6	100	7	14	9	50
WQD10-10-0.75	0.75	1	220/380	10	166	10	20	12	50
WQD13-10-1.1	1.1	1.5	220/380	13	216	10	21	13	50
WQD15-12-1.5	1.5	2	220/380	15	250	12	25	17	50

WQD (B SERIES)

SUBMERSIBLE SEWAGE PUMPS

潜水排污泵



工作条件:

1. 输送介质的温度不应高于40℃
2. 介质的pH范围为4~10。
3. 介质的运动粘度为: $7 \times 10^{-7} \sim 23 \times 10^{-6} \text{m}^2/\text{s}$;
4. 输送介质的最大密度为 $12 \times 10^3 \text{kg}/\text{m}^3$ 。

Working conditions:

1. The trans medium's temperature shouldn't be higher than 40℃
2. The trans medium's pH scope is from 4~10.
3. The kinematic viscosity of the trans medium is: $7 \times 10^{-7} \sim 23 \times 10^{-6} \text{m}^2/\text{s}$;
4. The maximum density of trans medium is $12 \times 10^3 \text{kg}/\text{m}^3$.

技术参数 / Technical parameters

型号 Model	功率 power		额定流量 Rate Flow		扬程 Head	转速 Speed	口径 Outlet
	Kw	HP	m³/h	L/min			
220V/280V							
WQD7-11-0.75	0.75	1	10	166	10	2900	50
WQD7-15-1.1	1.1	1.5	10	166	13	2900	50
WQD8-16-1.5	1.5	2	10	166	18	2900	50
WQD10-20-2.2	2.2	3	15	250	20	2900	50

WQD (V SERIES)

SUBMERSIBLE SEWAGE PUMPS

潜水排污泵



工作条件:

1. 输送介质的温度不应高于40℃
2. 介质的pH范围为4~10。
3. 介质的运动粘度为: $7 \times 10^{-7} \sim 23 \times 10^{-6} \text{m}^2/\text{s}$;
4. 输送介质的最大密度为 $12 \times 10^3 \text{kg}/\text{m}^3$ 。

Working conditions:

1. The trans medium's temperature shouldn't be higher than 40℃
2. The trans medium's pH scope is from 4~10.
3. The kinematic viscosity of the trans medium is: $7 \times 10^{-7} \sim 23 \times 10^{-6} \text{m}^2/\text{s}$;
4. The maximum density of trans medium is $12 \times 10^3 \text{kg}/\text{m}^3$.

技术参数 / Technical parameters

型号 Model	功率 power		最大流量 max.flow		最高扬程 max.Head	转速 Speed	口径 Outlet
	Kw	HP	m³/h	L/min			
220V/380V							
V180F	0.18	0.25	8	133	7	2900	25/32/40
V250F	0.25	0.33	9	150	7.5	2900	25/32/40
V450F	0.45	0.6	12	200	8.5	2900	50
V750F	0.75	1	18	300	12	2900	50
V1100F	1.1	1.5	20	333	9	2900	50
V1500F	1.5	2.2	27	450	18.5	2900	50
V2200F	2.2	3	42	700	17	2900	75
V1100DF	1.1	1.5	14	233	7	2900	50
V1300DF	1.3	1.7	18	300	12	2900	50
V1800DF	1.8	2.4	27	440	10	2900	75

WQD (C SERIES)

SUBMERSIBLE SEWAGE PUMPS

潜水排污泵



WQD (C SERIES)

SUBMERSIBLE SEWAGE PUMPS

潜水排污泵


产品特点:

WQD多级不锈钢由水泵、密封件和干式异步电动机组成。主要用于农业和一般场合给排水的电排水和灌溉设备。该电动泵具有体积小、重量轻、移动方便、安装简单、高效节能、经久耐用等特点。

Scope of application:

WQD multistage stainless steel is composed of water pump, sealing part and dry asynchronous motor. It is mainly used for electric drainage and irrigation equipment for water supply and drainage in agriculture and general occasions. The electric pump has the characteristics of small size, light weight, convenient movement, simple installation, high efficiency and energy conservation, and durability.

型号规格 / Model specification

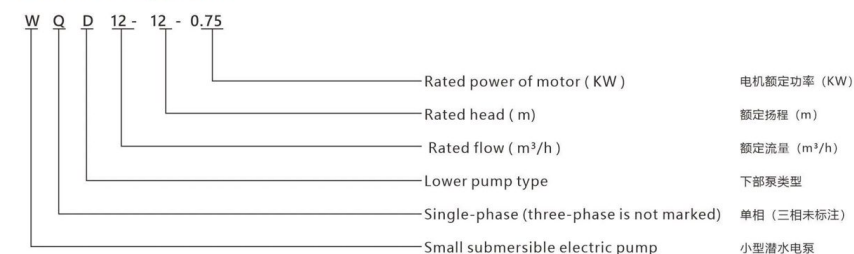

技术参数 / Technical parameters

型号 Model	功率 power		电压 voltage	额定流量 Rate Flow		扬程 Head	转速 Speed	口径 Outlet
220V/380V	Kw	HP	V	m³/h	L/min	m	r/min	mm
WQD6-6-0.55	0.55	0.7	220/380	6	100	6	2900	40/50
WQD10-8-0.75	0.75	1	220/380	10	166	8	2900	50
WQD10-10-1.1	1.1	1.5	220/380	10	166	10	2900	50
WQD15-8-1.1	1.1	1.5	220/380	15	250	8	2900	65
WQD15-10-1.5	1.5	2	220/380	15	250	10	2900	50
WQD20-8-1.5	1.5	2	220/380	20	333	8	2900	65
WQD15-15-2.2	2.2	3	220/380	15	250	15	2900	50
WQD20-12-2.2	2.2	3	220/380	20	333	12	2900	65
WQD30-10-2.2	2.2	3	220/380	30	500	10	2900	75

WQD (D Series)

SUBMERSIBLE SEWAGE PUMPS

潜水排污泵

工作条件:

1. 输送介质的温度不应高于40℃
2. 介质的pH范围为4~10.
3. 介质的运动粘度为: $7 \times 10^{-7} \sim 23 \times 10^{-6} \text{m}^2/\text{s}$;
4. 输送介质的最大密度为 $12 \times 10^3 \text{kg}/\text{m}^3$.

Working conditions:

1. The trans medium's temperature shouldn't be higher than 40℃
2. The trans medium's pH scope is from 4~10.
3. The kinematic viscosity of the trans medium is: $7 \times 10^{-7} \sim 23 \times 10^{-6} \text{m}^2/\text{s}$;
4. The maximum density of trans medium is $12 \times 10^3 \text{kg}/\text{m}^3$.



技术参数 / Technical parameters

型号 Model	功率 power		额定流量 Rate Flow		扬程 Head	转速 Speed	口径 Outlet
	Kw	HP	m³/h	L/min			
220V/380V							
WQD10-10-0.75	0.75	1.5	10	166	10	2900	50
WQD10-15-1.1	1.1	2	10	166	15	2900	50
WQD15-15-1.5	1.5	3	15	250	15	2900	50

WQD (E Series)

SUBMERSIBLE SEWAGE PUMPS

潜水排污泵



工作条件:

1. 输送介质的温度不应高于40℃
2. 介质的pH范围为4~10.
3. 介质的运动粘度为: $7 \times 10^{-7} \sim 23 \times 10^{-6} \text{m}^2/\text{s}$;
4. 输送介质的最大密度为 $12 \times 10^3 \text{kg}/\text{m}^3$.

Working conditions:

1. The trans medium's temperature shouldn't be higher than 40℃
2. The trans medium's pH scope is from 4~10.
3. The kinematic viscosity of the trans medium is: $7 \times 10^{-7} \sim 23 \times 10^{-6} \text{m}^2/\text{s}$;
4. The maximum density of trans medium is $12 \times 10^3 \text{kg}/\text{m}^3$.

技术参数 / Technical parameters

型号 Model	功率 power		电压 voltage	额定流量 Rate Flow		扬程 Head	转速 Speed	口径 Outlet
	Kw	HP		m³/h	L/min			
220V/380V			V			m	r/min	mm
WQD5-5-0.37	0.37	0.5	220	5	83	5	2900	25/32/40
WQD10-10-0.75	0.75	1.5	220	10	166	10	2900	50
WQD10-15-1.1	1.1	2	220/380	10	166	15	2900	50
WQD15-15-1.5	1.5	3	220/380	15	250	15	2900	50

WQD (F SERIES)

SUBMERSIBLE SEWAGE PUMPS

潜水排污泵

工作条件:

1. 输送介质的温度不应高于40℃
2. 介质的pH范围为4~10。
3. 介质的运动粘度为: $7 \times 10^{-7} \sim 23 \times 10^{-6} \text{m}^3/\text{s}$;
4. 输送介质的最大密度为 $12 \times 10^3 \text{kg}/\text{m}^3$ 。

Working conditions:

1. The trans medium's temperature shouldn't be higher than 40℃
2. The trans medium's pH scope is from 4~10.
3. The kinematic viscosity of the trans medium is: $7 \times 10^{-7} \sim 23 \times 10^{-6} \text{m}^3/\text{s}$;
4. The maximum density of trans medium is $12 \times 10^3 \text{kg}/\text{m}^3$.



技术参数 / Technical parameters

型号 Model	功率 power		额定流量 Rate Flow		扬程 Head	转速 Speed	口径 Outlet
	Kw	HP	m ³ /h	L/min			
WQD5-5-0.37	0.37	0.5	5	83	5	2900	25/32/40
WQD7-7-0.55	0.55	0.7	7	116	7	2900	40/50
WQD10-10-0.75	0.75	1	10	166	10	2900	50
WQD10-15-1.1	1.1	1.5	10	166	15	2900	50
WQD15-15-1.5	1.5	2	15	250	15	2900	50
WQD15-20-2.2	2.2	3	15	250	20	2900	50

WQX (G SERIES)

SUBMERSIBLE SEWAGE PUMPS

高扬程排污泵

主要用途:

主要用于化工、石油、制药、采矿、造纸工业、水泥厂炼钢厂、电厂煤加工工业以及城市污水处理排水系统、市政工程、建筑工地等行业输送带颗粒的污水、污物,也可用于抽送清水带腐蚀性介质。

Main Purpose:

Mainly used in industries such as chemical, petroleum, pharmaceutical, mining, papermaking, cement and steel plants, power plant coal processing, as well as urban sewage treatment plant drainage systems, municipal engineering, construction sites, etc., to transport wastewater and pollutants from conveyor belts. It can also be used for pumping clean water with corrosive media.

型号说明 / Model Description

WQX (D) 10 - 26 - 1.5

Power (kW)
Head (m)
Flow rate (m³/H)
Single phase
(three-phase motors are not marked with "D")
High head engineering sewage pump

功率(kw)
扬程(m)
流量(m³/h)
单相 (三相电机不标注"D")
高扬程工程污水泵



技术参数 / Technical parameters

型号 Model	功率 power		额定流量 Flow Rate		扬程 Head	转速 Speed	口径 Outlet
	Kw	HP	m ³ /h	L/min			
220V/380V							
50WQX6-26-1.5	1.5	2	6	100	26	2900	50
50WQX10-34-2.2	2.2	3	10	166	34	2900	50
50WQX10-44-3	3	4	10	166	44	2900	50
50WQX15-15-4	4	5.4	15	250	15	2900	50
50WQX15-55-5.5	5.5	0.7	15	250	55	2900	50
50WQX12-72-7.5	7.5	10	12	200	72	2900	50